


## XMI207 XML207 LED Exit & Emergency Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

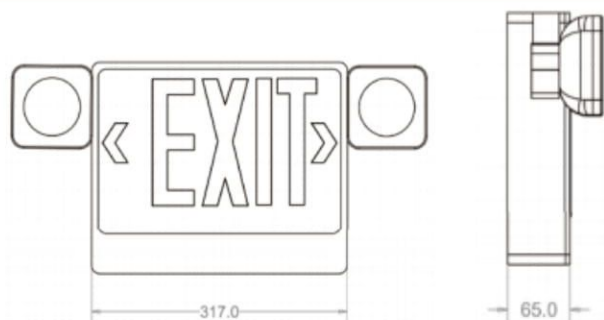

A	B	C	D	E	F	G
H						
Item No.:XMI207 XML207						

### Description

- 1) Injection-molded thermoplastic ABS housing
- 2) AC-Only or self-powered models.
- 3) 120V/347V AC operation.
- 4) Long-life, energy-saving LED technology.
- 5) Power-on LED indicator Light and push-to-test switch.
- 6) Comes standard with two pictogram films per face,  
for direction selection
- 7) Low volt battery disconnection-preventing deep  
discharge damage to the battery.
- 8) Universal canopy available.
- 9) Universal knockout chevrons.
- 10) Innovative, snap-together design allows for fast installation
- 11) UL listed.
- 12) Warranty-2 years limited warranty.

### Housing Colour

WH / BK

### Letter Colour

Green / Red

### Mounting

Universal (wall, side or ceiling mounting)

Key hole slots are stamped into the backplate

A	Series
XMI207 XML207	Exit Combo

B	Sign
	Exit Sign
R	Running

C	Input Voltage
	120V
347	347V

D	Face Q'ty
SF	Single Face
DF	Double Face

E	Battery Backup
	Battery Backup
AC	AC Only

EXIT & EMERGENCY LIGHT



### Lamps

LED mounted on print circuit board (for exit sign)  
2X6V 5.4 watt MR16 lamps for emergency mode

### Battery

Lead-Calcium battery (6v 4.5Ah)  
The sign is designed with a maintenance free  
Self-Powered model delivers standard two hours of  
back-up lighting  
Recharge time of the battery is twenty-four (24) hours.

### Warranty

2 years limited warranty.

F	Housing Color
BK	Black
WH	White

G	Letter Color
RD	Red
GN	Green

H	Arrow Direction
	No indicators
LA	Left indicator
RA	Right indicator
UA	Up indicator
DA	Down indicator
URA	45° up right
DRA	45° down right
ULA	45° up left
DLA	45° down left

EXIT & EMERGENCY LIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada  
9057998009