



XMI211 EML211 **Exit & Emergency Light**

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

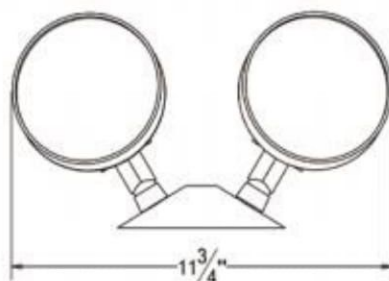

Housing

Injection-molded thermoplastic ABS housing.
UL 94V-0 flame rating.
Fully adjustable glare-free emergency light heads.

Electrical

120/277 VAC Dual voltage operation.
Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation.
LED indicator light and push button test switch.
Remote capability- may power additional remote heads (up to 6V 12W) with additional battery.

Lamp

2×6V 6W DC T5 wedge base lamps for emergency mode.

Battery

Lead-Calcium Battery (6V 4.5Ah).
May use additional battery, when add remote light heads to the fixture. (Total 2pcs×6V 4.5 Ah battery)
Low voltage battery disconnection.

Mounting

Wall or Ceiling mounting.
Easily removed mounting knock-outs and J-box pattern on back plate.

Warranty

2 years limited warranty.

EXIT & EMERGENCY LIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009