


**EXL013**  
**LED Exit & Emergency Light**

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

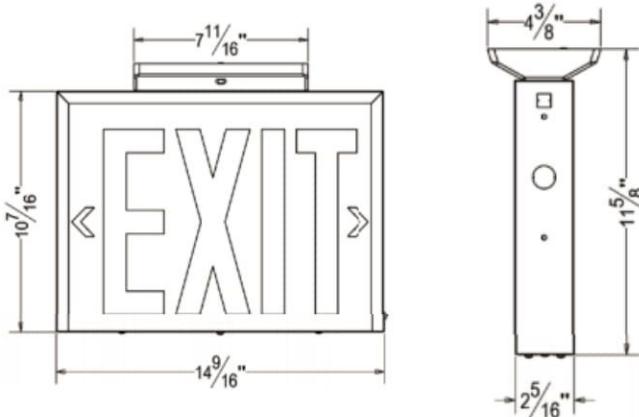

**Order Matrix:**

A    B    C    D    E    F    G

**Item No.: EXL013**

A	Series
EXL013	Exit Light

B	Sign
	Exit Sign
R	Running

C	Input Voltage
	120V
347	347V

D	Face Q'ty
SF	Single Face
DF	Double Face

E	Battery Backup
	Battery Backup
AC	AC Only

**Description**

- 1) Cold-rolled steel material
- 2) Supplied standard with two pictogram films per face, for direction selection
- 3) AC-Only or self-powered models.
- 4) 120V/347V AC operation.
- 5) Long-life, energy-saving LED technology.
- 6) Canopy mounting system designed specifically for ease of installation
- 7) Universal knockout chevrons.

**Housing Colour**

WH / BK

**Mounting**

Universal (wall, side or ceiling mounting)

Key hole slots are stamped into the backplate

**Electrical**

Universal 2-wire AC input Voltage of 120 to 347VAC at less than 3Watts and universal 2-wire DC input Voltage

from 6 to 24VDC at 1-2 Watt consumption for single and double face signs  
White light-emitting diodes  
Even illumination in normal and emergency operation

F	Letter Color
RD	Red
GN	Green

#### **Battery**

The sign is designed with a maintenance free Self-Powered model delivers 90 minutes min. of back-up lighting  
Recharge time of the battery is twenty-four (24) hours.

#### **Warranty**

2 years limited warranty.

G	Arrow Direction
	No indicators
LA	Left indicator
RA	Right indicator
UA	Up indicator
DA	Down indicator
URA	45° up right
DRA	45° down right
ULA	45° up left
DLA	45° down left

