


FM-L150
15" Flush Mount LED
Ceiling Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

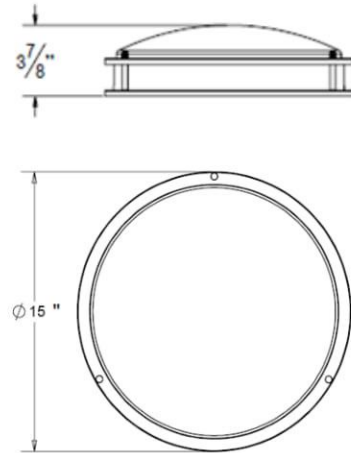

Description

Versatile, stylish and energy-efficient fixture with chic, contemporary appearance.
 Aluminum construction with a translucent white acrylic polymer cover.
 Rotated separated reflector, more convenient for parts replacement.
 Isolation driver, high power factor and transfer efficiency, constant current output.
 Can be mounted on ceiling or wall.

Specification

Power	23W
Voltage	120V 50/60Hz
Lumen	1600LM
Power Factor	PF>0.95
CRI	80+/90+
Dimmable	TRIAC Dimming
Finish Color	Satin Nickel/White/Black/Chrome
Warranty	3 Years
Certification	ETL

ARCHITECTURAL DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
 9057998009

Lamp Body

Cold drawing stamping molding, high precision.

PMMA Cover

High light transmittance, can reach 85% above, strong light diffusion performance, no shadow, no glare.

Achieve point light source emitting turned into spherical light emitting.

Excellent concealed light source, achieve the best light transmission rate without seeing the LED lamp bead.

Driver

Independent isolation constant current drive, high power factor optional.

Constant current design, high reliability, stable performance.

Meets the requirements of safety and electromagnetic compatibility.

Application

Automotive and Parking, Education, Government, Healthcare,


Hospitality, Offices and Banks, Religious, Retail

Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.

3 Year Limited Warranty.

Packing

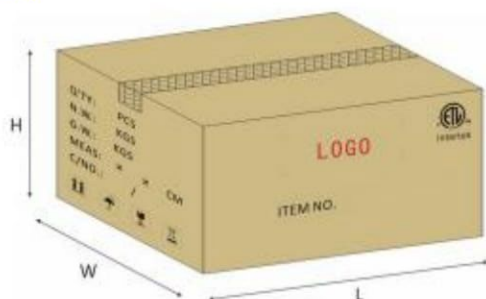

Carton Box: 53.5x44x44.5CM 5PCS/CARTON

Ordering Guide

Series	CCT	CRI	Color
☐ FM-L150	☐ 2700K	☐ 80	☐ Satin Nickel
	☐ 3000K	☐ 90	☐ White
	☐ 3500K		☐ Black
			☐ Chrome

