


**XM205I**  
**LED Exit & Emergency Light**

<b>Catalog #</b>		<b>Prepared by</b>	LiteHarbor
<b>Project</b>		<b>Date</b>	
<b>Notes</b>			

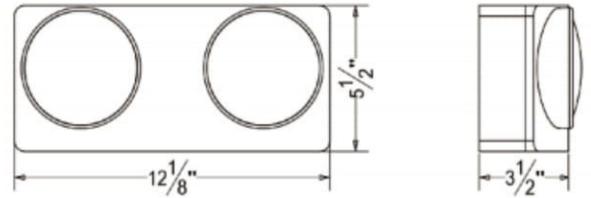

**Housing**

Injection-molded thermoplastic ABS housing.  
 94V-0 flame rating.  
 Two fully adjustable eyeball shape light heads for emergency light.  
 Innovative, snap-together design for fast installation.

**Electrical**

120/277 VAC Dual voltage operation.  
 Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation.  
 LED indicator light and push button test switch.  
 Remote capability- may power additional remote heads ( up to 6V 12W) with additional battery.

**Lamp**

2×6V 5.4W DC T15 wedge lamps for emergency mode.

**Battery**

Lead-Calcium Battery (6V 4.5Ah).  
 May use additional battery, when add remote light heads to the fixture. ( Total 2pcs×6V 4.5 Ah battery)  
 Low voltage battery disconnection.

**Mounting**

Wall or Ceiling mounting.  
 Easily removed mounting knock-outs and J-box pattern on back plate.

**Warranty**

2 years limited warranty.

EXIT & EMERGENCY LIGHT

