



## LED SPOT LIGHT

### DG6403



## DESCRIPTION


### DATA

- Input: DC12-36V
- Life span: >50000h
- IP Rating: IP65
- Class: CLASS I
- Mounting: Cantilever mounting
- Working Temperature: -30 ~50°C
- Power Factor: >0.95
- Light Source: 5050 SMD
- Beam Angle: 180°

### MOUNTING

- Wire rope suspension installation
- slot installation
- screw installation
- strong glue paste installation


### DIMENSIONS

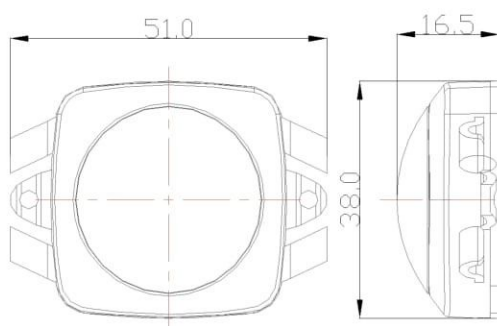

L: 51xW: 38xH: 16.5mm

### FEATURES

- Appearance simplicity, comfortable, unique shape.
- Simple but without losing the atmosphere
- Lamp structure. Electrical safety fully comply with EN60598 GB7000 standard requirements
- Waterproof structure design. IP Rating reaching IP65
- LED cold light source. Built in microcomputer chip. Can be arbitrary programming control. Multiple simultaneous changes
- Monochromatic change also can realize synchronous colorful gradient. saltus step.scanning.
- Light water color change effect and a plurality of point light source composed of LED dot matrix screen.
- Can change a variety of pictures.Text and animation effects
- a supplement to linear light sources and floodlights.elegant appearance design requirement
- LED Spot light can be used not only for dot matrix display
- For buildings, bridges and other city lighting project building outline hotels and entertainment venues indoor decorative lighting projects
- Long life power supply to ensure that the service life of 50000 hours or more with the short circuit protection open circuit protection thermal protection and other multiple protection function to achieve synchronization with the LED lamp life.

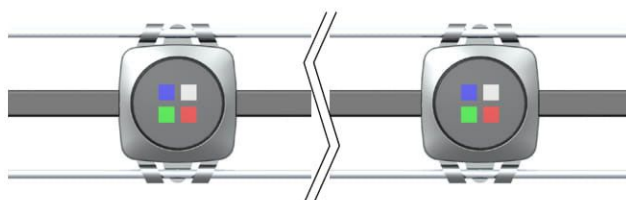



#### APPLICATION

- Suitable for to buildings, bridges, landmark buildings, billboards and other landscape lighting
- Other Special Requirements please Confirm with Factory

#### ORDERING GUIDE

| Model               | DG6403                                                                                                                  | DG6403A  | DG6403B                | DG6403C    | DG6403D                | DG6403E    |
|---------------------|-------------------------------------------------------------------------------------------------------------------------|----------|------------------------|------------|------------------------|------------|
| Input Voltage       | DC12-36V                                                                                                                | DC12-36V | DC12-36V               | DC12-36V   | DC12-36V               | DC12-36V   |
| Power Factor        | >0.95                                                                                                                   | >0.95    | >0.95                  | >0.95      | >0.95                  | >0.95      |
| Pixel Type          | 1R1G1B                                                                                                                  | 2R2G2B   | 3R3G3B                 | RGBW(3PCS) | RGBW(6PCS)             | RGBW(1PCS) |
| Power               | 1W                                                                                                                      | 2W       | 3W                     | 1.5W       | 3W                     | 1W         |
| Light Source        | 5050 SMD                                                                                                                |          |                        |            |                        |            |
| Ermeability         | 60%-80%                                                                                                                 | 60%      | 80%                    | 60%        | 80%                    | 60%        |
| Ambient Temperature | -30 - -60℃                                                                                                              |          |                        |            |                        |            |
| Color Temperature   | Warm white:2850K-3200K                                                                                                  |          | Pure white:3700K-4200K |            | Cool white:4700K-5300K |            |
| IP Rating           | IP65                                                                                                                    |          |                        |            |                        |            |
| Service Life        | >50000h                                                                                                                 |          |                        |            |                        |            |
| Installation        | Suspension and installation of steel wire rope / Card slot installation / Screw mounting / Strong adhesive installation |          |                        |            |                        |            |
| Dimensions          | 51x38x16.5mm                                                                                                            |          |                        |            |                        |            |



Website



Facebook



Google+



Twitter