



LED STREET LIGHT DG5104



A



B



C

DESCRIPTION


FEATURES

- The smooth linear and the LED structure characteristic organic combination, Appearance simplicity and comfortable, The concept design of the humanized structure of the lamp.
- Excellent self cleaning function, Curve shape design, Simple, delicate and smooth, Good self cleaning function, make the light body surface clean, To maintain good heat dissipation effect, to ensure the life of LED.
- High pressure die casting aluminum alloy (ADC12) integral forming, With sufficient strength and good seismic performance, At the same time, the whole lamp protection level is good, reaching IP65.
- Unique two light distribution design, the lost light curve is a bat wing, the standard rectangular light spot, to ensure that the light distance in the 40M can achieve good uniformity.
- Long life power supply to ensure that the service life of 50000 hours or more, with the short circuit protection
- open circuit protection, thermal protection and other multiple protection functions, to achieve
- synchronization with the LED lamp life




DESCRIPTION

- Specifically designed for road lighting needs
- To optimize the design of a new type of environmental protection and energy saving products which meet the special requirements of the road.
- This product uses CREE high power LED light source.

LIGHT DISTRIBUTION CURVE

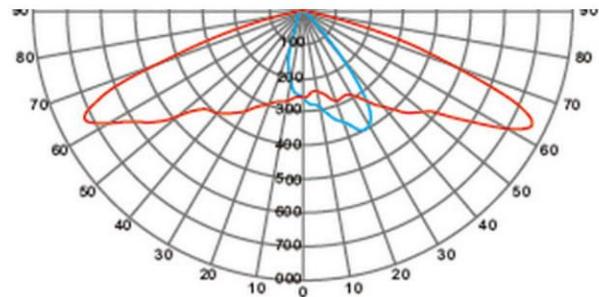

DIMENSIONS

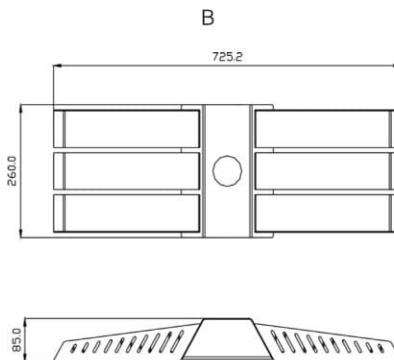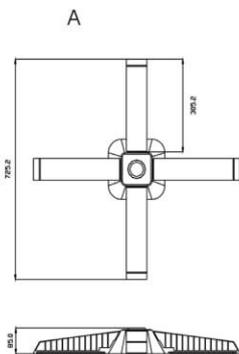

L: 750xW: 419.5xH: 120mm



Website



Facebook



Google+



Twitter



APPLICATION

- Suitable for urban trunk roads, sub trunk road, Sidewalk, Residential district Industrial area, square, park, school, Villa courtyard etc.
- Other Special Requirements please Confirm with Factory

ORDERING GUIDE

Model	DG5104	DG5104A	DG5104B	DG5104C	DG5104D	DG5104E
Input Voltage	AC90-305V	AC90-305V	AC90-305V	AC90-305V	AC90-305V	AC90-305V
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
LED Light	26X3X1W	26X4X1W	26X2X1W	26X5X1W	26X6X1W	26X7X1W
Power	90W	120W	60W	150W	180W	210W
Luminous Efficiency	>110lm/W	>110lm/W	>110lm/W	>110lm/W	>110lm/W	>110lm/W
Luminous flux	9900lm	13200lm	6600lm	16500lm	19800lm	23100lm
Ambient Temperature	-30 - -50°C					
Color Temperature	Warm white:2850K-3200K		Pure white:3700K-4200K		Cool white:4700K-5300K	
IP Rating	IP65					
Service Life	>50000h					
Installation	Cantilever Mounting					
Dimensions	750X419.5X120mm					



Website



Facebook



Google+



Twitter

1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009