





SOLARENERGY WALLLIGHT DG5701

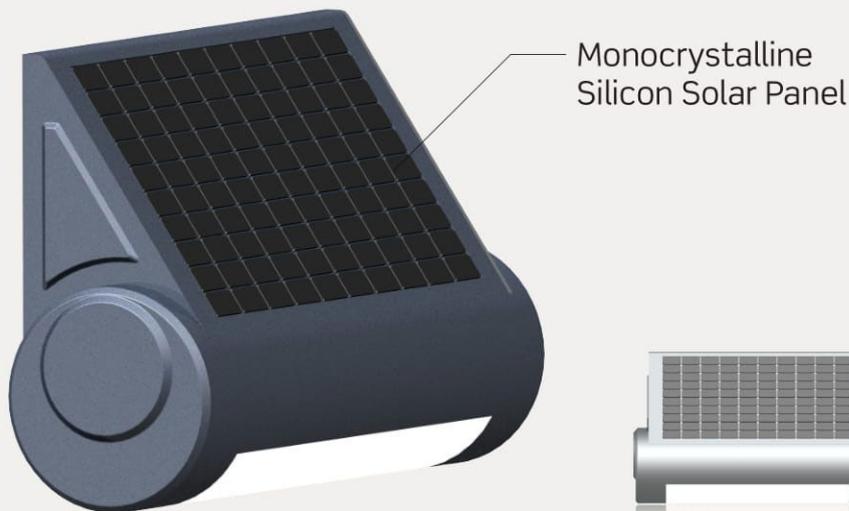


DESCRIPTION


Details

- Wattage: 5W
- Voltage: AC90-305V
- CCT: Warm white 2850K-3200K
Pure white 3700K-4200K
Cool white 4700K-5300K
- CRI: >75
- Life Span > 5,000 Hours
- IP Rating: IP65
- Working Temperature: -30 ~ -50°C
- Dimensions: 163X100X50mm 326X200X100mm
- Power Factor: >0.95
- Frequency Range: 47-63Hz

DIMENSIONS

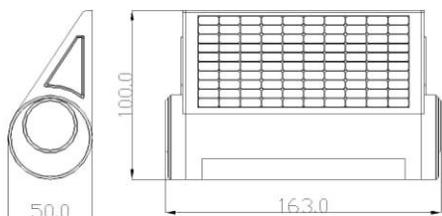

L: 163xW: 100xH: 50mm

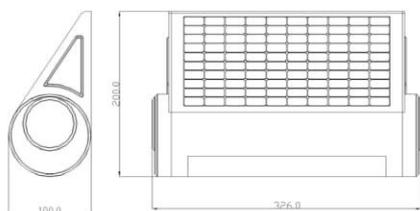


L: 326xW: 200xH: 100mm

FEATURES

- Appearance simplicity, comfortable, unique shape. Simple but without losing the atmosphere
- Lamp structure. Electrical safety fully comply with EN60598 GB7000 standard requirements
- Waterproof structure design. IP Rating reaching IP65
- The lamp adopts reflector light distribution design
- Reflector is using high pure mirror aluminum stamping. High efficiency
- The lamp adopts imported monocrystalline silicon solar panel
- Absorb sunlight during the day. Release electric energy at night. Realize zero electric bill and green lighting.
- Long life power supply to ensure that the service life of 50000 hours or more with the short circuit protection open circuit protection, thermal protection and other multiple protection functions
- to achieve synchronization with the LED lamp life

LIGHT DISTRIBUTION CURVE

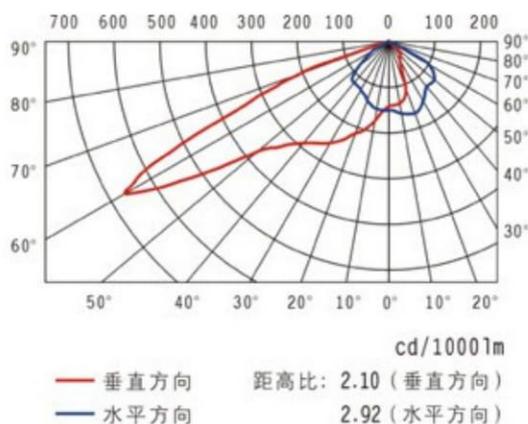



APPLICATION

- Suitable for Residential district Industrial area, square, park, school, Villa.Outdoor wall corridor etc.
- Other Special Requirements please Confirm with Factory

ORDERING GUIDE

Model	DG5701	DG5701A	DG5701B	DG5701C	DG5701D	DG5701E
Input Voltage	AC90-305V	AC90-305V	AC90-305V	AC90-305V	AC90-305V	AC90-305V
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
LED Light	10X0.5W(3030)	10X1W(3030)	15X1W(3030)	20X1W(3030)	25X1W(3030)	30X1W(3030)
Power	5W	10W	15W	20W	25W	30W
Luminous Efficiency	>100lm/W	>100lm/W	>100lm/W	>100lm/W	>100lm/W	>100lm/W
Luminous flux	500lm	1000lm	1500lm	2000lm	2500lm	3000lm
Monocrystalline silicon				Solar Panel		
Ambient Temperature	-30 - -50°C					
Color Temperature	Warm white:2850K-3200K		Pure white:3700K-4200K		Cool white:4700K-5300K	
IP Rating	IP65					
Service Life	>50000h					
Installation	Wall mounted					
Dimensions	163X100X50mm			326X200X100mm		



Website



Facebook



Google+



Twitter