

BL3-007
3" Super-thin Gimbal LED
Recessed Panel Light

Catalog #		Prepared LiteHarbor	
Project		Date	
Notes			



Front



Back

3" Super-thin Gimbal LED Recessed Panel Light

Features

- The 6W super-thin gimbal recessed panel light is a high performance, easy installation of the residential lighting. Provides a good light output, good light, smooth and soft, high efficiency and energy saving.
- Using aluminum casting, good heat dissipation, simple and beautiful modelling of appearance.
- Dimmable, good compatibility matched with multi-brand dimmers, dimming stable and even, no strobe.
- Easy installation and time-saving, tool-free, no housing.
- New construction optional.
- The innovation type gimbal panel light, adjustable lighting direction, meet the demand for multiple lighting.

Mounting

Cut hole in ceiling and snap fixture in opening with attached spring clips. 2" above ceiling clearance required for driver.

Order Matrix

A B C D E F G H

Item No.: BL3-007

A	Series
BL3-007	3" Gimbal Panel Light

B	Mounting
	Remodel
	New Construction

C	Trim
TL	Trimless

D	Input Voltage
	120V

PANEL LIGHT



Specification

Applications	Recessed Ceiling Mount
Wattage	6W
Light Output	390lm
CRI	80+/90+
CCT	2700K-4100K
Driver Input	120V AC 50/60 Hz
Power Factor	>0.9
Dimming	TRIAC Dimmers 10%-100% (120V only)
Location	Insulated Ceiling & Damp Locations
Lifespan	50,000 Hours at 70% Light Output
Certification	ETL/ENERGY STAR
Warranty	5 Year Limited for Fixture & Driver

E	Color Temperature
27K	2700K
30K	3000K
35K	3500K
41K	4100K

F	Dimmable
	Non-Dimmable
DM	Dimmable

G	Finish
WH	White
BK	Black
SN	Satin Nickel

H	Mounting Clips Optional
	Option ①
	Option ②


(Reference to the following page)

Packing

Inner Box Size: 125X105X80 mm 1PCS/Box

CTN Size: 39.5X26.5X33 cm 24PCS/CTN

Dimensions

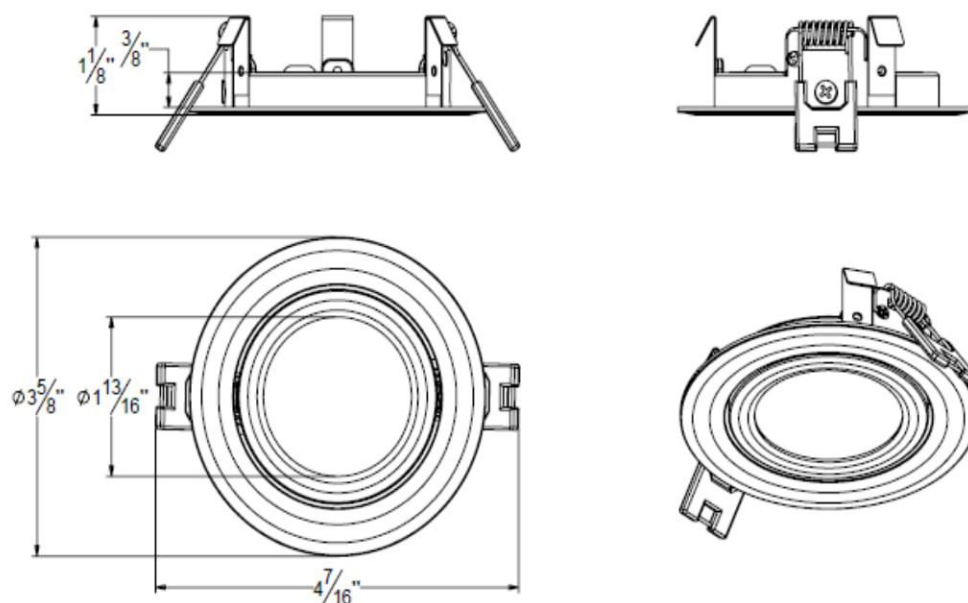

Trimmed



Trimless



Mounting Clips Optional



Option①



Option②