


AF5-R
5 inch Compact Fluorescent Remodel
Non-IC Recessed Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

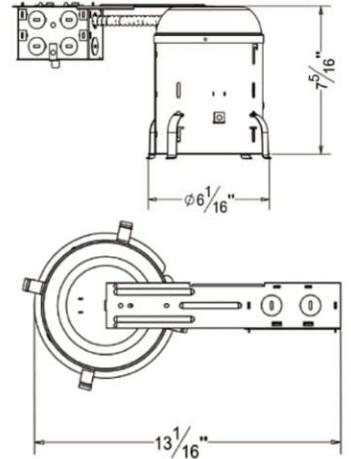

5 inch Compact Fluorescent Remodel Non-IC Recessed Housing

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

Order Matrix

A B C D

Item No.: AF5-R

A	Series
AF5-R	5" / Compact Fluorescent Remodel NON-IC Housing

B	Input Voltage
277	120V 277V

C	Wattage
F13	CFL 13W
F18	CFL 18W
F26	CFL 26W

RECESSED DOWNLIGHT



Lamp & Socket

See Trim for max. wattage and lamp
CRI>80%
PF>0.9
Color Temperature:2800K-6500K

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory

RECESSED DOWNLIGHT



5" TRIM OPTIONS



B5021

5" Clear Reflector Trim with Baffle

Lamp: 13/18/26W TRT



B5022

5" Cone Reflector Trim

Lamp: 13/18/26W TRT



B5300

5" Shower Trim with Fresnel Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5400

5" Shower Trim with Albalite lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5500

5" Shower Trim with Drop Opal

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5600

5" Shower Trim with Dome Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5700

5" Shower Trim with Centre Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5800

5" Shower Trim with Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed

RECESSED DOWNLIGHT