

BL4-FM55 & BL4-SFM55 LED 5" Flush Mount

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



BL4-FM55



BL4-SFM55

ORDER MATRIX | Example:BL4-FM55

A **B** **C** **D** **E**

A	Series
BL4-FM55	Round 5.5" LED Flush Mount
BL4-SFM55	Square 5.5" LED Flush Mount

B	Input Voltage
	120V
277	277V

C	Dimmable
	Non-Dimmable
DM	Dimmable

D	LED Available
Cree	Cree
Citizen	Citizen
Epistar	Epistar
Seoul	Seoul
Osram	Osram

Description

An architecturally pleasing, easy to install and low profile slim LED instant mount round and square aperture downlighting.

Slim line, light weight and sleek look, provides more uniform light and an instant on.

It is a low profile downlight intended for ceiling or wall mount applications.

This luminaire offers the appearance of a recessed downlight but is actually surface mounted.

Applications

Slim LED Flush Mount Downlight is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look.

This downlighting solution offers an affordable alternative to Air-Seal IC recessed housings or Fire-Rated boxes, reducing material and installation costs.

Features

LED 5.5" flush mount

Decorative flush mount LED fixture

LED 10.5W Equal to a traditional 55W lamp

LED CEILING LIGHT



E	Emergency System
	Without Emergency Battery Backup
EM	With Emergency Battery Backup

80 CRI, 800lm
 90 CRI, 640lm
 80% energy savings
 Damp location listed
 Mounts directly to 3" and 4" junction boxes
 Easy to install

Finish

Available in White, Brushed Nickel, and Bronze

Usage


Residential
 Office
 Retail
 Hospitality

Listing & Warranty


ENERGY STAR
 2-Year Limited Warranty

Dimensions

Ø: 5 1/2"xH:1"

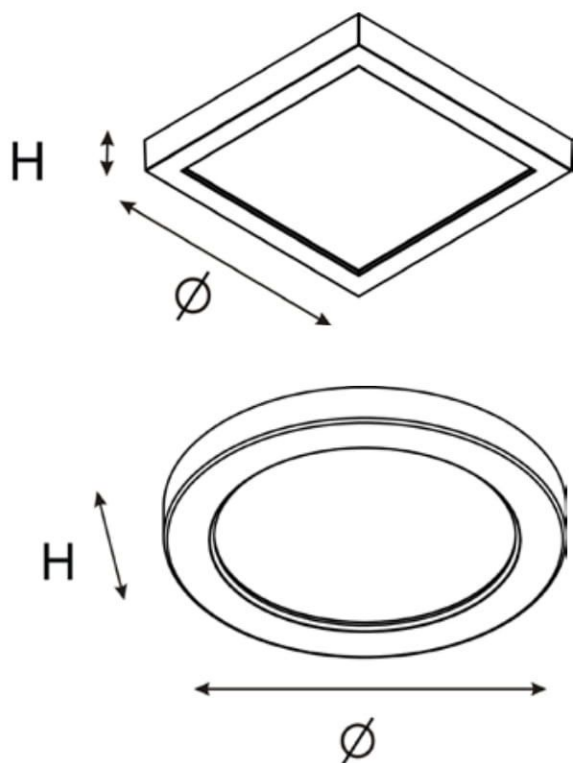

Light Distribution

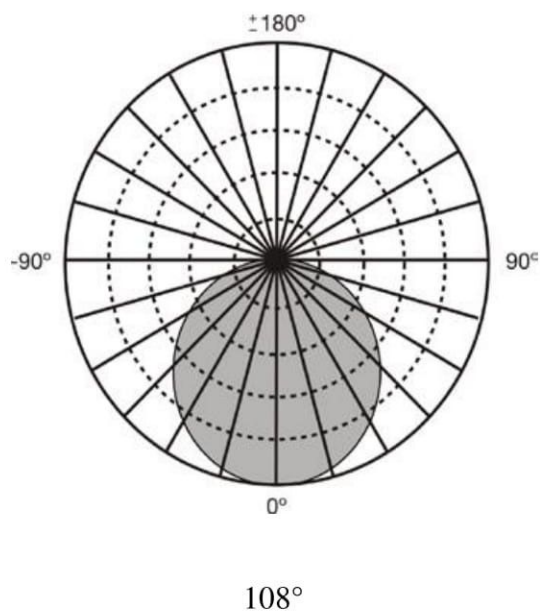

Emergency

24 hours recharge time

>90 minute operation from battery

over-charge/discharge protection

Dimensions

Ø: 5 1/2"xH:2 3/16"



Installation Instruction

Fast and Easy Installation

- Mounts directly to any 3" and 4" junction boxes
- The quick connector makes easy and fast connection, the universal mounting plate ensure a clean and tight fit.



Simply screw the unique design universal mounting plate to the junction box



Make your connections using the quick connect included, and fit into place.



Snap the fixture onto the mounting plate.



Installation finished, Enjoy the sleek ceiling.

LED CEILING LIGHT

Ordering Guide

Series	Input Voltage	Dimmable	CCT	Finish	Emergency System
<input type="checkbox"/> BL4-FM55 5.5"Round LED Flush Mount	<input type="checkbox"/> 110V <input type="checkbox"/> 277V	<input type="checkbox"/> Non-Dimmable <input type="checkbox"/> Dimmable	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K <input type="checkbox"/> Tunable (3000K, 4000K, 5000K, choose any 2 of them)	<input type="checkbox"/> White <input type="checkbox"/> Bronze <input type="checkbox"/> Satin Nickel	<input type="checkbox"/> Without Emergency Batty Backup <input type="checkbox"/> With Emergency
<input type="checkbox"/> BL4-SFM55 5.5"Square LED Flush Mount					



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009