



DG5213 LED FLOOD LIGHT



Removable
Can be replaced with different mounting parts for multiple installations



In-ground Mounting



Suspension Mounting



Tree Hanging Mounting

DESCRIPTION

- Ultra-thin streamlined external light design and LED structure features organically combined, the appearance is simple.
- 4mm tempered clear glass, light transmittance up to 95%, reduce the light loss.
- High density die casting aluminum lamp body with reasonable heat dissipation design to ensure the service life of lamps.
- Adopt brand LED light source.
- Outdoor professional static outdoor plastic powder sprayed on surface, anti-UV, anti-corrosion and weather resistance is strong.
- Lighting structure, electrical safety compliance with EN60598 GB7000 standard requirements.
- Electric shock protection: Class I
- IP rating: IP66


UNIQUE TOUCH SWITCH DIMMING FUNCTION:

3CCT (3000K/4500K/6000K).


UNIQUE OUTDOOR WALL SWITCH COLOR TEMPERATURE CONTROL FUNCTION:

3CCT (3000K/4500K/6000K)

ORDER MATRIX:

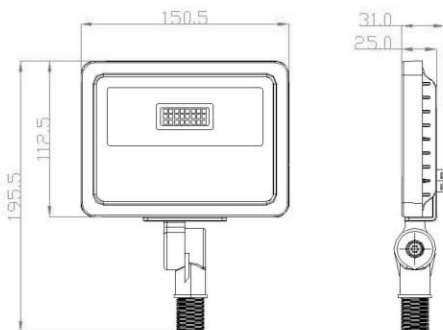

L=112.5mm W=150mm H=31mm

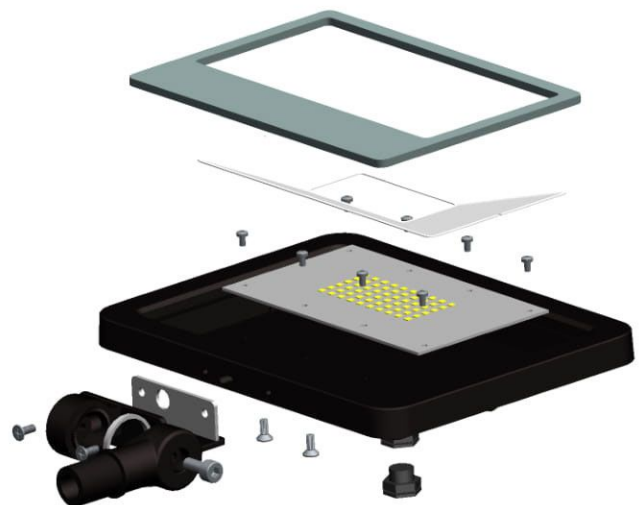



APPLICATION:

Suitable for factories, gymnasiums, wharfs, billboards, buildings, lawn, gardening design and other lighting and decorative lighting places.

ORDERING GUIDE

| Model | Input Voltage | Light Source | Power | Luminous Efficiency | Optional light | Luminous Flux | Dimensions |
|---------|---------------|--------------|-------|---------------------|----------------|---------------|----------------|
| DG5213 | AC120V | 24 PCS | 10W | >100lm/W | 120 | 1000lm | 112.5X216X31mm |
| DG5213A | AC120V | 48 PCS | 20W | >100lm/W | 120 | 2000lm | 112.5X216X31mm |

OTHER PARAMETERS

| | | | |
|--------------------------------|--|-------|-------|
| Applicable Ambient Temperature | - 30 --50°C | | |
| Total Harmonic Distortion | < 15% | | |
| Working Temperature | RH10%-90% | | |
| CRI | Ra>75-95 optional | | |
| CCT | 3000K | 4500K | 6000K |
| IP Rating | IP 66 | | |
| Life Span | >20000h/>30000h/>50000h are optional | | |
| Power Factor | > 0.95 | | |
| Frequency Range | 50-60Hz | | |
| Electric-shock safeguard | CLASS I | | |
| Mounting | In-ground Mounting / Suspension Mounting / Tree Hanging Mounting | | |



Website



Facebook



Google+



Twitter

1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009