



DG5212 LED FLOOD LIGHT



Removable
Can be replaced with different mounting parts for multiple installations



In-ground Mounting



Suspension Mounting



Tree Hanging Mounting


DESCRIPTION

- Ultra-thin streamlined external light design and LED structure features organically combined, the appearance is simple.
- 4mm tempered clear glass, light transmittance up to 95%, reduce the light loss.
- High density die casting aluminum lamp body with reasonable heat dissipation design to ensure the service life of lamps.
- Adopt brand LED light source.
- Outdoor professional static outdoor plastic powder sprayed on surface, anti-UV, anti-corrosion and weather resistance is strong.
- Lighting structure, electrical safety compliance with EN60598 GB7000 standard requirements.
- Electric shock protection: Class I
- IP rating: IP66


UNIQUE TOUCH SWITCH DIMMING FUNCTION:
3CCT (3000K/4500K/6000K).

UNIQUE OUTDOOR WALL SWITCH COLOR TEMPERATURE CONTROL FUNCTION:
3CCT (3000K/4500K/6000K)

ORDER MATRIX:

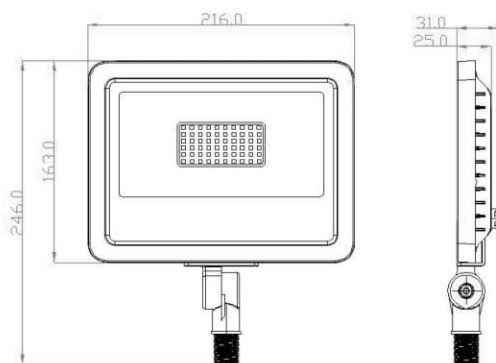

L=163mm W=216mm H=31mm

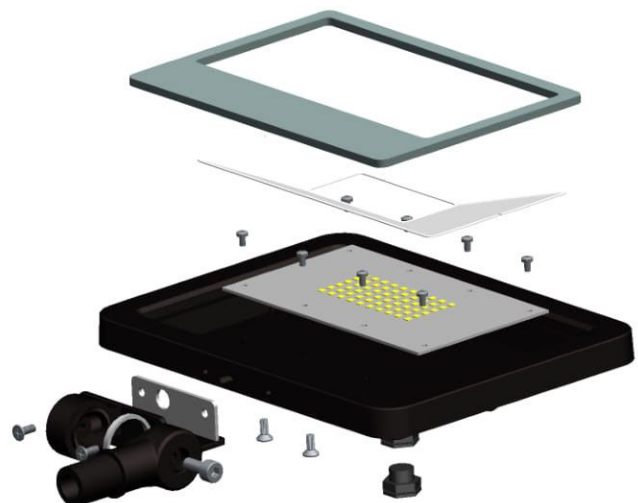



APPLICATION:

Suitable for factories, gymnasiums, wharfs, billboards, buildings, lawn, gardening design and other lighting and decorative lighting places.

ORDERING GUIDE

Model	Input Voltage	Light Source	Power	Luminous Efficiency	Optional light	Luminous Flux	Dimensions
DG5212	AC120V	64 PCS	30W	>100lm/W	120	3000lm	163X216X31mm
DG5212A	AC120V	128 PCS	50W	>100lm/W	120	5000lm	163X216X31mm

OTHER PARAMETERS

Applicable Ambient Temperature	- 30 --50°C		
Total Harmonic Distortion	< 15%		
Working Temperature	RH10%-90%		
CRI	Ra>75-95 optional		
CCT	3000K	4500K	6000K
IP Rating	IP 66		
Life Span	>20000h/>30000h/>50000h are optional		
Power Factor	> 0.95		
Frequency Range	50-60Hz		
Electric-shock safeguard	CLASS I		
Mounting	In-ground Mounting / Suspension Mounting / Tree Hanging Mounting		



Website



Facebook



Google+



Twitter

1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009