


**AF5**  
**5 inch Compact Fluorescent New Construction Non-IC Recessed Housing**

<b>Catalog #</b>		<b>Prepared by</b>	LiteHarbor
<b>Project</b>		<b>Date</b>	
<b>Notes</b>			

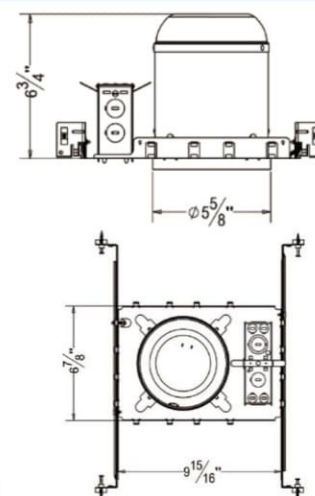

**5 inch Compact Fluorescent New Construction Non-IC Recessed Housing**

**Housing**

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

**Hanger Bar**

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

**Junction Box**

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

**Order Matrix**

**A      B      C      D**

<b>Item No.:</b>	<b>AF5</b>
------------------	------------

A	Series
AF5	5"/ Compact Fluorescent New Construc NON-IC Housing

B	Input Voltage
	120V
277	277V

C	Wattage
F13	CFL 13W
F18	CFL 18W
F26	CFL 26W

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada  
9057998009

### Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

### Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

### Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada  
9057998009

## 5" TRIM OPTICS



### B5021

**5" Clear Reflector Trim with Baffle**

**Lamp:** 13/18/26W TRT



### B5022

**5" Cone Reflector Trim**

**Lamp:** 13/18/26W TRT



### B5300

**5" Shower Trim with Fresnel Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed



### B5400

**5" Shower Trim with Albalite lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed



### B5500

**5" Shower Trim with Drop Opal Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed



### B5600

**5" Shower Trim with Dome Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed



### B5700

**5" Shower Trim with Centre Frosted Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed



### B5800

**5" Shower Trim with Frosted Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.  
Wet location listed

RECESSED DOWNLIGHT