

A5
5 inch New Construction Non-IC
Recessed Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



5 inch New Construction Non-IC Recessed Housing

Housing


- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

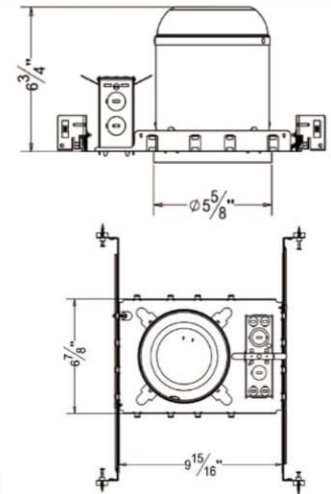

Order Matrix

A	B	C	D	E
----------	----------	----------	----------	----------

Item No.:A5

A	Series
A5	5"/ New Construction NON-IC Housing

B	Input Voltage
120V	
277	277V

C	Lamp
P30	PAR30
R30	R30
A19	A19

D	Wattage
L12	LED 12W
L18	LED 18W



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

RECESSED DOWNLIGHT

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

E	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

5" TRIM OPTICS



B5001

5" Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5002

5" Reflector Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5003

5" Eyeball Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5003L

5" Large Eyeball Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5007

5" Gimbal Ring Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5011

5" Cone Baffle Trim

Lamp: A19 LED E26 12W Max.



B5011K

5" Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B5021

5" Clear Reflector Trim with Baffle

Lamp: A19 LED E26 12W Max.



B5022

5" Cone Reflector Trim

Lamp: A19 LED E26 12W Max.



B5300

5" Shower Trim with Fresnel Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed

RECESSED DOWNLIGHT



B5400

5" Shower Trim with Albalite lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed



B5500

5" Shower Trim with Drop Opal

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed



B5602

5" Shower Trim with Dome Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed



B5700

5" Shower Trim with Centre Frosted Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed



B5800

5" Shower Trim with Frosted Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture

Wet location listed

RECESSED DOWNLIGHT