


**AF6-RIA**  
**6 inch Compact Fluorescent Remodel**  
**IC Airtight Recessed Housing**

Catalog #		Prepared by		LiteHarbor
Project		Date		
Notes				

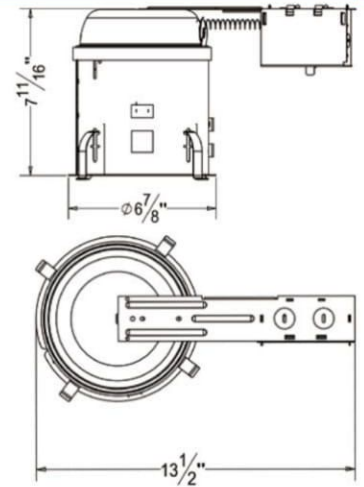

**6 inch Compact Fluorescent Remodel IC Airtight**  
**Recessed Housing**

**Housing**

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.

**Junction Box**

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

**Ballast**

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

**Order Matrix**

**A      B      C      D**

**Item No.:AF6-RIA**

A	Series
AF6-RIA	6"/ Compact Fluorescent Remodel IC Airtight Housing

B	Input Voltage
	120V
277	277V

C	Wattage
F13	CFL 13W
F18	CFL 18W
F26	CFL 26W

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada  
9057998009

### Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

### Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



## 6" COMPACT FLUORESCENT TRIM OPTICS



### B6011

**6" Full Reflector Baffle Cone Trim**

**Lamp:** 18/26/32W TRT



### B6012

**6" Clear Reflector With Baffle**

**Lamp:** 18/26/32W TRT



### B6012W

**6" Full Reflector Trim**

**Lamp:** 18/26/32W TRT



### B6022

**6" Cone Trim With Reflector**

**Lamp:** 18/26/32W TRT



### BF6302

**6" Shower Trim With Fresnel Lens**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed



### BF6402

**6" Shower Trim With Albalite Lens**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed



### BF6502

**6" Shower Trim With Drop Opal Lens**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed



### BF6512

**6" Clear Specular Reflector With Drop Glass**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed



### BF6702

**6" Shower Trim With Frosted Spot Lens**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed



### BF6800

**6" Shower Trim With Sand Blasted Lens**

**Lamp:** 13/18/26W TRT

Gasket used to prevent moisture  
Wet location listed

RECESSED DOWNLIGHT