


AF6-R
6 inch Compact Fluorescent Remodel
Non-IC Recessed Housing

Catalog #		Prepared by		LiteHarbor
Project		Date		
Notes				

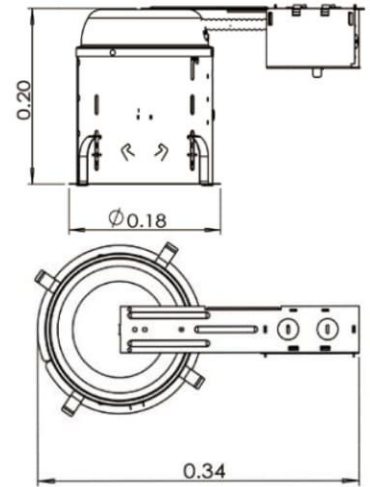

6 inch Compact Fluorescent Remodel Non-IC
Recessed Housing

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

Order Matrix

A B C D

Item No.:AF6-R

A	Series
AF6-R	6"/ Compact Fluorescent Remodel NON-IC Housing

B	Input Voltage
	120V
277	277V

C	Wattage
F18	CFL 18W
F26	CFL 26W
F32	CFL 32W

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



6" COMPACT FLUORESCENT TRIM OPTICS



B6011

6" Full Reflector Baffle Cone Trim

Lamp: 18/26/32W TRT



B6012

6" Clear Reflector With Baffle

Lamp: 18/26/32W TRT



B6012W

6" Full Reflector Trim

Lamp: 18/26/32W TRT



B6022

6" Cone Trim With Reflector

Lamp: 18/26/32W TRT



BF6302

6" Shower Trim With Fresnel Lens

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed



BF6402

6" Shower Trim With Albalite Lens

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed



BF6502

6" Shower Trim With Drop Opal Lens

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed



BF6512

6" Clear Specular Reflector With Drop Glass

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed



BF6702

6" Shower Trim With Frosted Spot Lens

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed



BF6800

6" Shower Trim With Sand Blasted Lens

Lamp: 13/18/26W TRT

Gasket used to prevent moisture
Wet location listed