

**A6-PIA**  
**6 inch New Construction IC Airtight**  
**Slope Recessed Housing**

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



**6 inch New Construction IC Airtight Slope Recessed Housing**

**Housing**



- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.

**Hanger Bar**

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

**Junction Box**

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

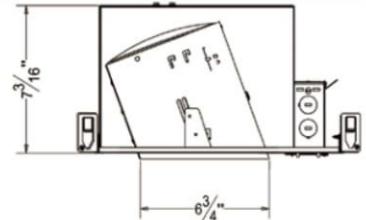

**Order Matrix**

A      B      C      D      E

**Item No.:A6-PIA**

A Series

A6-PIA 6"/ New Construction IC Airtight Slope Housing

B Input Voltage

120V  
277 277V

C Lamp

P30 PAR30  
R30 R30

D Wattage

L12 LED 12W  
L18 LED 18W

### Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature: 2800K-6500K

E	Color Temperature
28K	2800K
35K	3500K
50K	5000K
60K	6000K

### Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada  
9057998009

## 6" SLOPE TRIM OPTICS



**BP6001**

**6" Slope Trim With Baffle**

**Lamp:** R30/PAR30 LED E26 18W Max.



**BP6002**

**6" Slope Trim With Reflector**

**Lamp:** R30/PAR30 LED E26 18W Max.

*RECESSED DOWNLIGHT*