

A6-S
6 inch New Construction Non-IC
Shallow Recessed Housing

Catalog #		Prepared by		LiteHarbor
Project		Date		
Notes				



6 inch New Construction Non-IC Shallow Recessed Housing

Housing


- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

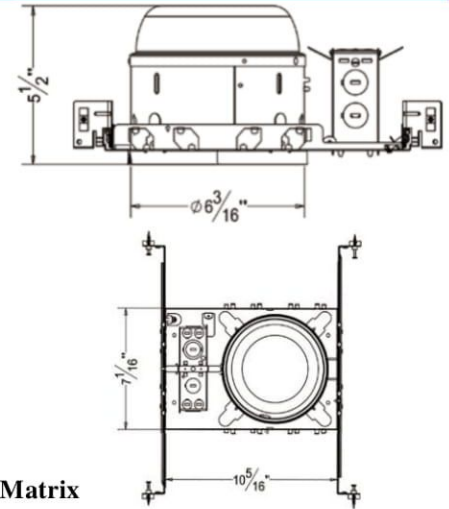

Order Matrix

A B C D E

Item No.:A6-S

A	Series
A6-S	6"/ New Construction NON-IC Shallow Housing

B	Input Voltage
277	120V
277	277V

C	Lamp
P30	PAR30
P38	PAR38
R30	R30
R40	R40
A19	A19

D	Wattage
L12	LED 12W
L18	LED 18W
L24	LED 24W

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

E	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

6" TRIM OPTICS



B6001

6" Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6001L

6" Baffle Trim

Lamp: R40/PAR38 LED E26 24W Max.



B6002

6" Reflector Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6002L

6" Reflector Trim

Lamp: R40/PAR38 LED E26 24W Max.



B6003

6" Eyeball Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6003B

6" Eyeball Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6007

6" Gimbal Ring Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6007L

6" PAR38 Gimbal Ring Trim

Lamp: R40/PAR38 LED E26 24W Max.



B6011

6" Cone Baffle Trim

Lamp: A19 LED E26 12W Max.



B6012

6" Reflector and Baffle Trim

Lamp: A19 LED E26 12W Max.

RECESSED DOWNLIGHT



B6012W

6" Full Reflector Trim

Lamp: A19 LED E26 12W Max.



B6013

6" Eyeball and Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6016

6" Wall Wash Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6017

6" Gimbal Ring Trim with Baffle

Lamp: R30/PAR30 LED E26 18W Max.



B6017L

6" Adjustable Gimbal Trim with Baffle

Lamp: R40/PAR38 LED E26 24W Max.



B6021

6" PAR30 Baffle Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6021L

6" PAR38 Baffle Trim

Lamp: R40/PAR38 LED E26 24W Max.



B6022

6" Cone Reflector Trim

Lamp: A19 LED E26 12W Max.



B6026

6" Wall Wash Reflector Trim

Lamp: R30/PAR30 LED E26 18W Max.



B6300

6" Shower Trim with Fresnel Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture
Wet location listed



B6400

6" Shower Trim with Albalite Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture
Wet location listed



B6500

6" Shower Trim with Drop Opal

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture
Wet location listed



B6700

6" Shower Trim with Centre Frosted Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture
Wet location listed



B6800

6" Shower with Frosted Lens

Lamp: A19 LED E26 12W Max.

Gasket used to prevent moisture
Wet location listed