

A6-P
6 inch New Construction Non-IC Slope
Recessed Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



6 inch New Construction Non-IC Slope Recessed Housing

Housing


- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

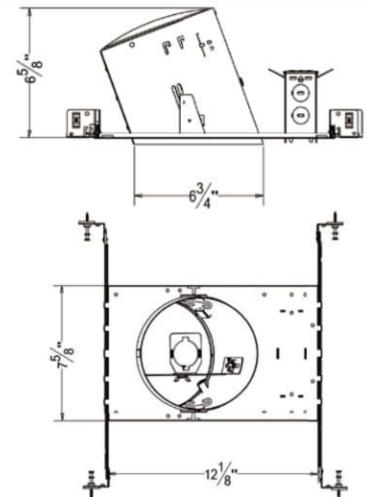

Order Matrix

A B C D E

Item No.:A6-P

A	Series
A6-P	6" New Construction NON-IC Slope Housing

B	Input Voltage
120V	
277	277V

C	Lamp
P30	PAR30
R30	R30

D	Wattage
L12	LED 12W
L18	LED 18W

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

E	Color Temperature
28K	2800K
35K	3500K
50K	5000K
60K	6000K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory

RECESSED DOWNLIGHT



1055 CLARK BLVD, BRAMPTON, ON, L6T 3W4 Canada
9057998009

6" SLOPE TRIM OPTICS



BP6001

6" Slope Trim With Baffle

Lamp: R30/PAR30 LED E26 18W Max.



BP6002

6" Slope Trim With Reflector

Lamp: R30/PAR30 LED E26 18W Max.

RECESSED DOWNLIGHT